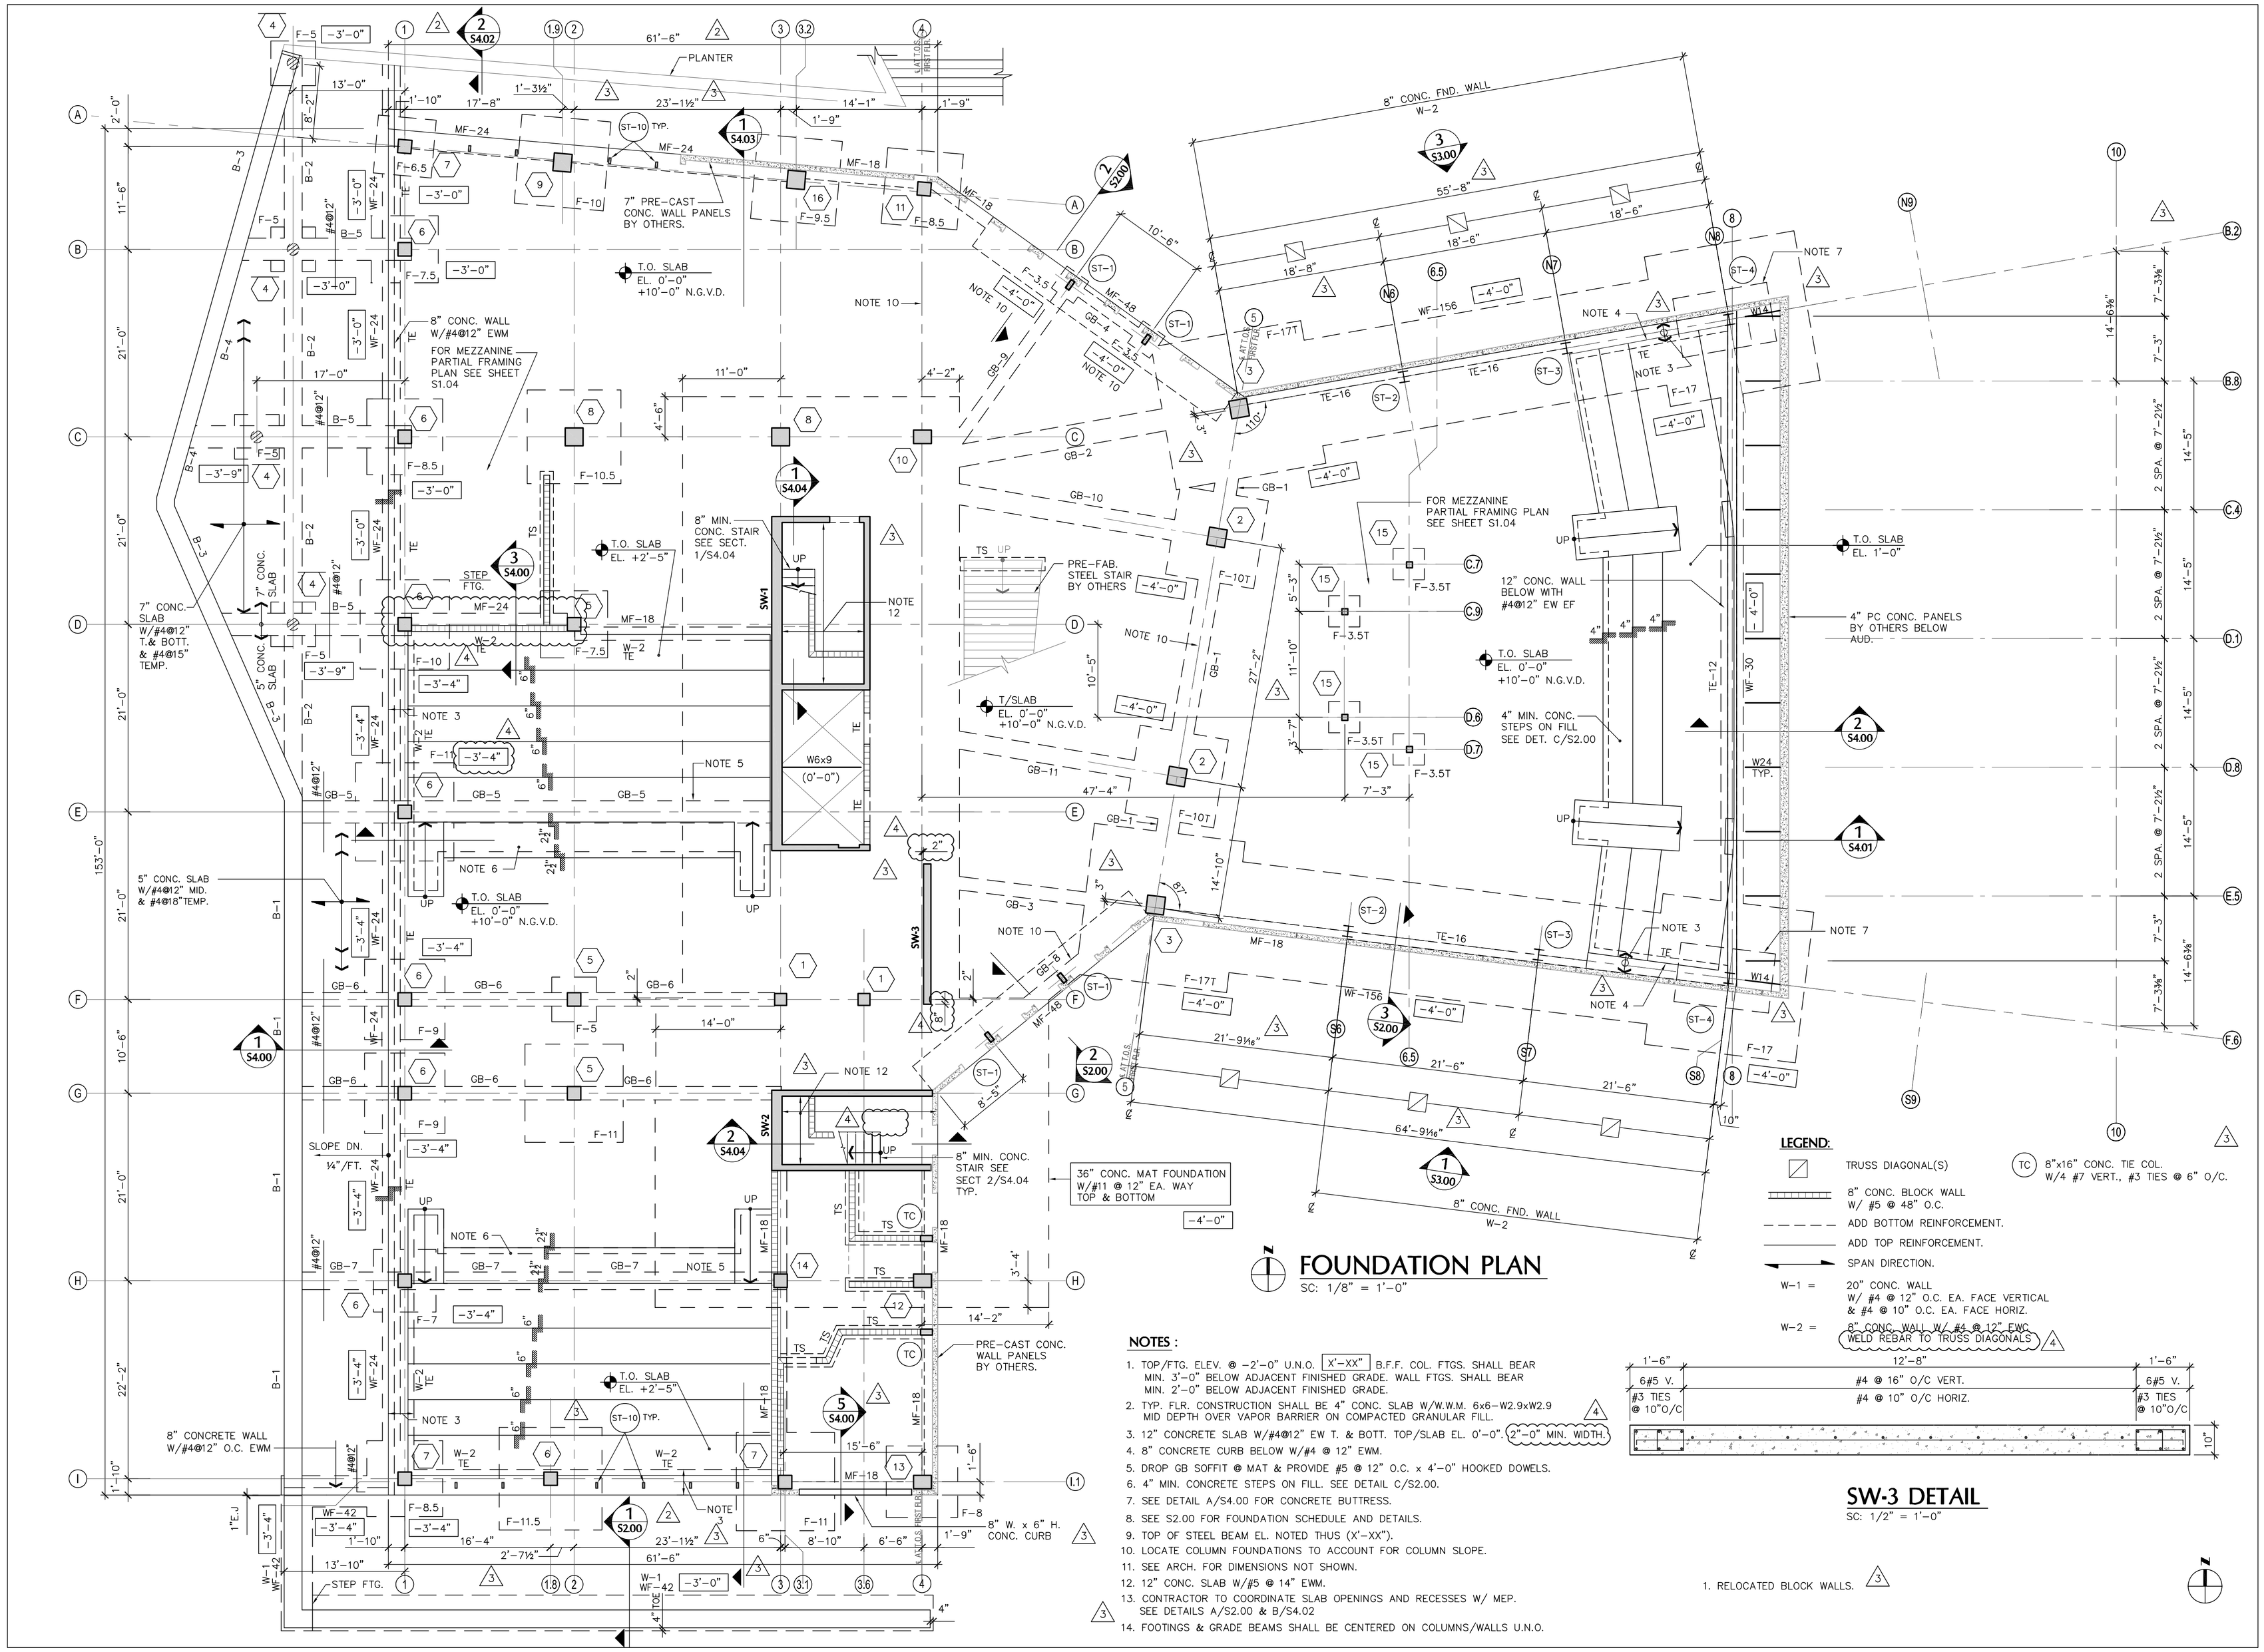

FOUNDATION PLAN

SC: 1/8" = 1'-0"

NOTES :

1. TOP/FTG. ELEV. @ -2'-0" U.N.O. X'-XX" B.F.F. COL. FTGS. SHALL BEAR MIN. 3'-0" BELOW ADJACENT FINISHED GRADE. WALL FTGS. SHALL BEAR MIN. 2'-0" BELOW ADJACENT FINISHED GRADE.
2. TYP. FLR. CONSTRUCTION SHALL BE 4" CONC. SLAB W/W.W.M. 6x6-W2.9xW2.9 MID DEPTH OVER VAPOR BARRIER ON COMPACTED GRANULAR FILL.
3. 12" CONCRETE SLAB W/#4@12" EW T. & BOTT. TOP/SLAB EL. 0'-0". 2'-0" MIN. WIDTH.
4. 8" CONCRETE CURB BELOW W/#4 @ 12" EWM.
5. DROP GB SOFFIT @ MAT & PROVIDE #5 @ 12" O.C. x 4'-0" HOOKED DOWELS.
6. 4" MIN. CONCRETE STEPS ON FILL. SEE DETAIL C/S2.00.
7. SEE DETAIL A/S4.00 FOR CONCRETE BUTTRESS.
8. SEE S2.00 FOR FOUNDATION SCHEDULE AND DETAILS.
9. TOP OF STEEL BEAM EL. NOTED THUS (X'-XX").
10. LOCATE COLUMN FOUNDATIONS TO ACCOUNT FOR COLUMN SLOPE.
11. SEE ARCH. FOR DIMENSIONS NOT SHOWN.
12. 12" CONC. SLAB W/#5 @ 14" EWM.
13. CONTRACTOR TO COORDINATE SLAB OPENINGS AND RECESSES W/ MEP. SEE DETAILS A/S2.00 & B/S4.02
14. FOOTINGS & GRADE BEAMS SHALL BE CENTERED ON COLUMNS/WALLS U.N.O.

LEGEND:

- TRUSS DIAGONAL(S)
- 8" CONC. BLOCK WALL W/ #5 @ 48" O.C.
- ADD BOTTOM REINFORCEMENT.
- ADD TOP REINFORCEMENT.
- SPAN DIRECTION.
- W-1 = 20" CONC. WALL W/ #4 @ 12" O.C. EA. FACE VERTICAL & #4 @ 10" O.C. EA. FACE HORIZ.
- W-2 = 8" CONC. WALL W/ #4 @ 12" EWM WELD REBAR TO TRUSS DIAGONALS
- TC 8"x16" CONC. TIE COL. W/4 #7 VERT., #3 TIES @ 6" O/C.

SW-3 DETAIL

SC: 1/2" = 1'-0"

1. RELOCATED BLOCK WALLS.

SCHOOL OF INTERNATIONAL AND PUBLIC AFFAIRS
BT-635
MIAMI, FLORIDA

FLORIDA INTERNATIONAL UNIVERSITY
MIAMI, FLORIDA

ARCHITECT OF RECORD

ARQUITECTONICA
801 Brickell Ave, Suite 1100
Miami, Florida 33131
T 305.372.1812
F 305.372.1175
www.arquitectonica.com

STRUCTURAL ENGINEER:
PISTORINO & ALAM
7171 S.W. 62nd Ave, 4th FL
MIAMI, FL 33143
305.669.2700
305.669.2165

M.E.P. ENGINEER:
MEP ENGINEERING, INC
10590 N.W. 27th Street, SUITE 101
MIAMI, FL 33172
305.471.0160
305.593.2530

LANDSCAPE ARCHITECT
ARQUITECTONICAGEO
801 BRICKELL AVE, SUITE 1100
MIAMI, FL 33131
305.372.1812
305.372.1175

CIVIL ENGINEER:
TERRA CIVIL ENGINEERING
7855 NW 12 STREET, SUITE 202
DORAL, FL 33126
305.499.5010
786.664.6500

CONSULTANT:
NUTTING ENGINEERS
1310 NEPTUNE DRIVE
BOYTON BEACH, FL 33246
561.736.4900
561.737.9975

CONSULTANT:
WAVEGUIDE
8270 WOODLAND CENTER BLVD.
TAMPA, FLORIDA 33614
813-739-8998
813-769-3516

SEAL / SIGNATURE / DATE

JASON TAYLOR
FL. P.E. # 60277
P. & A. PROJECT No. 07-179

REVISION 02 - AUGUST 14 2009

OFFICE REGISTRATION #: AA C000465

Date	Revision
08-14-09	REVISION 02
10-28-09	REVISION 03
11-06-09	REVISION 04

Issue (#)	Issue Date / For
7.24.07	SCHEMATIC DESIGN APPROVAL
11.12.07	SCHEMATIC DESIGN APPROVAL
02.22.08	SCHEMATIC DESIGN APPROVAL
03.28.08	SCHEMATIC DESIGN APPROVAL
10.21.08	PROGRESS DESIGN DEVELOPMENT
11.26.08	100 % DESIGN DEVELOPMENT
02.25.09	FOUNDATION PERMIT
03.18.09	50% CONSTRUCTION DOCUMENTS
05.18.09	100% CONSTRUCTION DOCUMENTS

PROJECT NO.: 2441

SHEET INDEX

FOUNDATION PLAN
SCALE 1/8"=1'-0"

S1.01

© 2009 ARQUITECTONICA INTERNATIONAL, INC.